

LED High Bay Light Series

(The "XX" represents Color temperature.)

Model No.: BH-HB01-XX01 BH-HB02-XX01
BH-HB03-XX01

Power: 100W 150W 200W




1.Features

- Universal voltage AC100-277V/200-240V/200-520V/347V, 50/60Hz.
- 140lm/W for fixture.
- Using high quality 3030 chips, LM-80 report and IES data available.
- Mean Well UL/cUL driver.
- High Power Factor >0.9, Low THD Driver.
- Black die-casting aluminum case, and Matte Surface.
- Dust-proof and waterproof, IP65.
- 5 years Warranty.
- UL/DLC/Lighting facts certificate.





Beam Angle 60°、90° or 120°(Optional)


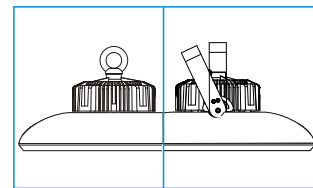


Rings installed or Adjustable Angle installed (Optional)



2.Drawing

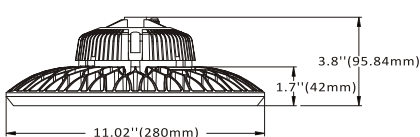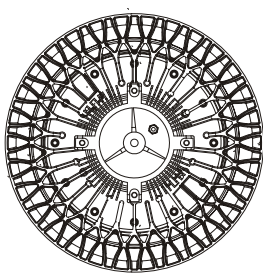

100W

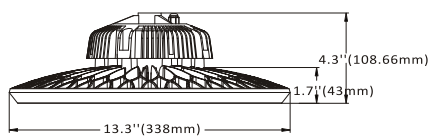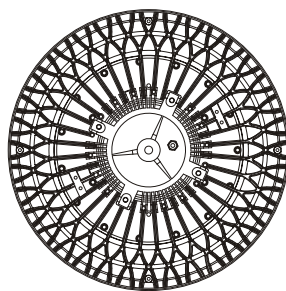

150W

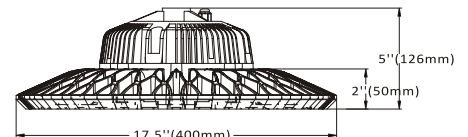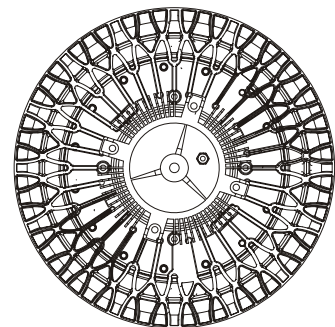

200W



LM80



ErP



IP65



3.Application

Widely used in Factory, Workshop, Warehouse, Logistics Center Exhibition Hall, Gymnasium, Shipyards, Mining, Gas Station, Supermarket, Other Places.




4.Parameters

The "XX" represents Color temperature.

Item	Model	BH-HB01-XX01	BH-HB02-XX01	BH-HB03-XX01
General Performance	Power	100W	150W	200W
	Lumen Output	14000lm	21000lm	28000lm
	Efficacy	140lm/W		
	Color Temperature	3000K/4000K/5000K/5700K		
	LED	3030		
Electrical	Power Factor	>0.9		
	Input Voltage	AC100-277V/200-240V/200-520V/347V, 50/60Hz		
	THD	<20%		
Physical	Weight	2.9Kg	3.9Kg	5.5Kg
	Dimension	280x280x150mm	340x340x165mm	400x400x180mm
	Housing	Die-cast aluminum		
	Beam Angle	60°、90° or 120°		
	Lens	Matte Surface		
	Mounting	Rings installed or Adjustable Angle installed (Optional)		
	Operation Temperature	-35°C~55°C		
	Humidity	20%~85%,non condensing		
	Finish	Black		
	IP rated	IP65		
Certificate	Certificate	UL,DLC,LM80		
	Material Usage	RoHS compliant		
	Driver Class	Class II		
	LED Class	LM80 rated to 50,000 hours		



6. Packaging

No.	Model	Power	N.W.	Inner Box	G.W	Qty/ctn	Outer Carton
1	BH-HB01-XX01	100W	2.9Kg	--	3.5Kg	1	360x360x175mm
2	BH-HB02-XX01	150W	3.9Kg	--	4.7Kg	1	420x420x185mm
3	BH-HB03-XX01	200W	5.5Kg	--	6.6Kg	1	475x470x195mm

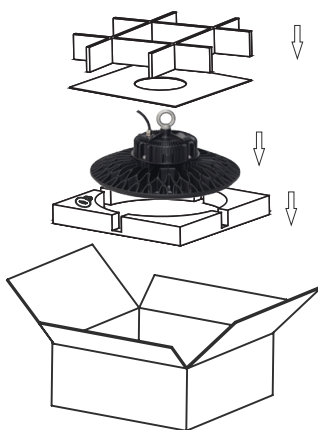


7. Installation instructions

Option 1

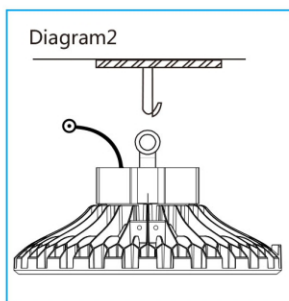
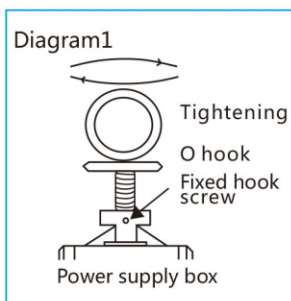


Ensure the fixed wall strong enough can bear 30kg

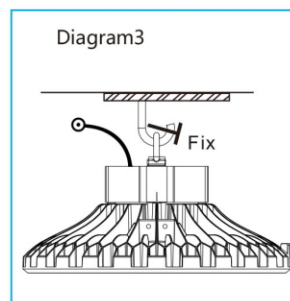

Turn on the power and test

Option 2

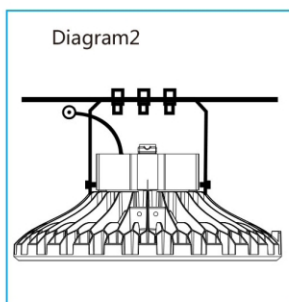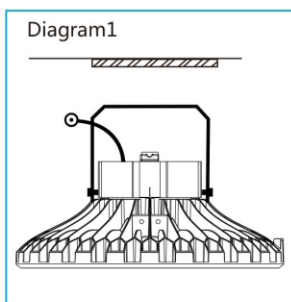

Turn on the power and test